




SYSTEM COVERS AND SYSTEM SEALS FOR CABLES

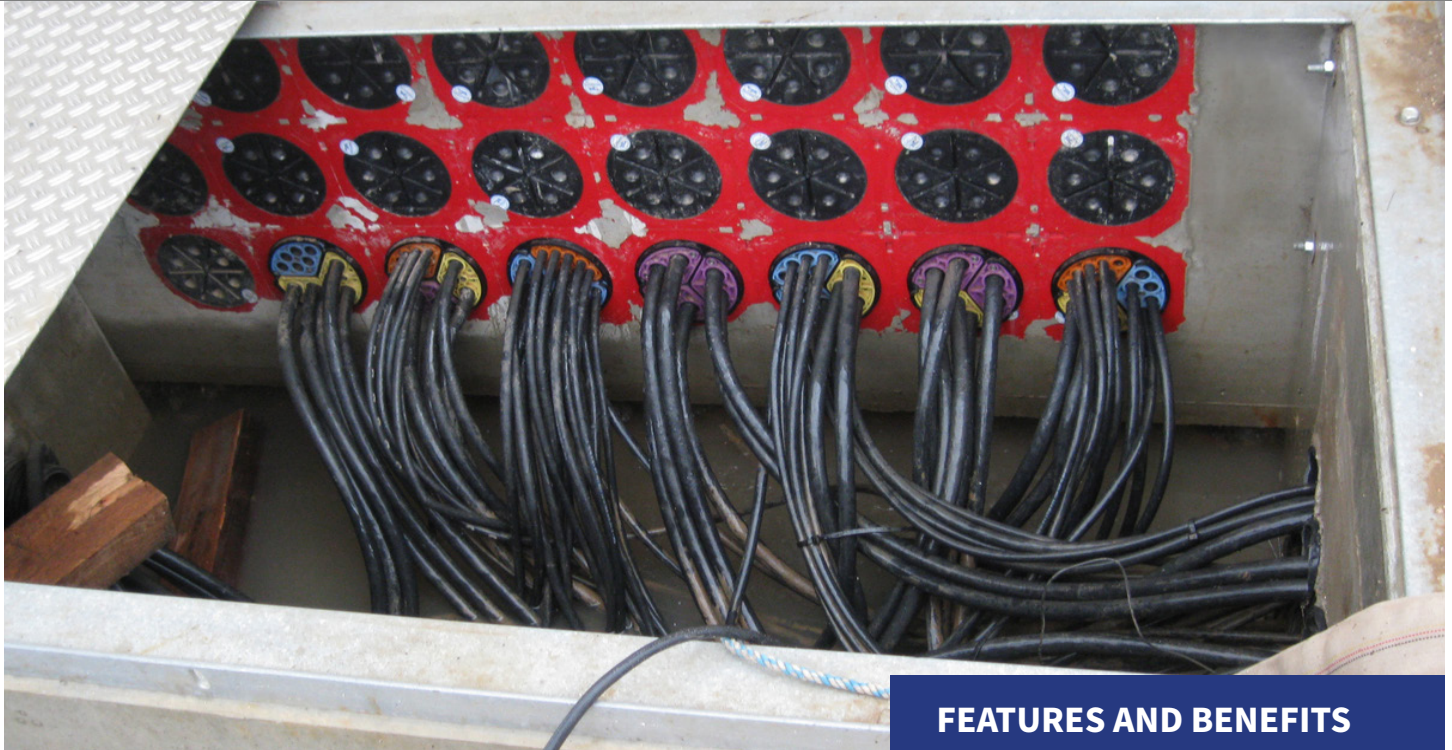

Flexible Cable Management Solution that Integrates with PHSI-150 Varia

Segmento offers an engineered cable-management solution for structure entrances. It accommodates a wide range of electrical, signal, telecommunication, and PV cables of various sizes. It arranges them in a more organized manner, providing an easy way to change out cables or update a system—a concern for data centers or any application needing a quick response to outages or upgrades.



FEATURES AND BENEFITS

- **FLEXIBLE & GENTLE**
Sealing with Technogel
- **INTEGRATED**
Torque control system
- **SIMPLE**
Easy to re-use and re-install
- **SECURE**
All segment openings closed with blind plugs
- **GASTIGHT & WATERTIGHT**
Up to 7.25 psi (0.5 bar) when installed on outside of the building

Polywater | Hauff-Technik—Segmento System Cover and Seals



ITEM	CATALOG #
System cover as segment receptacle	PHSI-150-S3
The violet segment application area for 2 cables, diameter 0.787 – 1.220 inch (20 – 31 mm), including 2 blind plugs	PSEG-2/31
The yellow segment application area for 3 cables, diameter 0.787 – 1.023 inch (20 – 26 mm), including 3 blind plugs	PSEG-3/26
The blue segment application area for 6 cables, diameter 0.59 -0.826 inch (15 – 21 mm), including 6 blind plugs	PSEG-6/21
The orange segment application area for 8 cables, diameter 0.196 - 0.590 inch (5 – 15 mm), including 8 blind plugs	PSEG-8/15



4 different segment options



Different segments can be connected.



Wall inserts fitted with SEGMENTOS.



Matching accessories, such as the lubricant and torque control screwdriver for installation, are found on the Accessories page.



Contact us for additional building entry solutions.

polywater-haufftechnik.com | polywater.com

IMPORTANT NOTICE: The statements here are made in good faith based on tests and observations we believe to be reliable. However, the completeness and accuracy of the information is not guaranteed. Before using, the end-user should conduct whatever evaluations are necessary to determine that the product is suitable for the intended use.

American Polywater expressly disclaims any implied warranties and conditions of merchantability and fitness for a particular purpose. American Polywater's only obligation shall be to replace such quantity of the product proven to be defective. Except for the replacement remedy, American Polywater shall not be liable for any loss, injury, or direct, indirect, or consequential damages resulting from a product's use, regardless of the legal theory asserted.

© 2021 American Polywater Corporation (08/21) LIT-SEGMENTONFLYER/REV000

Polywater
Solutions at work.

American Polywater Corporation
11222 60th Street N.
Stillwater, MN 55082 USA

+1 651-430-2270
+1 800-328-9384 Toll Free
+1 651-430-3634 Fax
email: support@polywater.com