
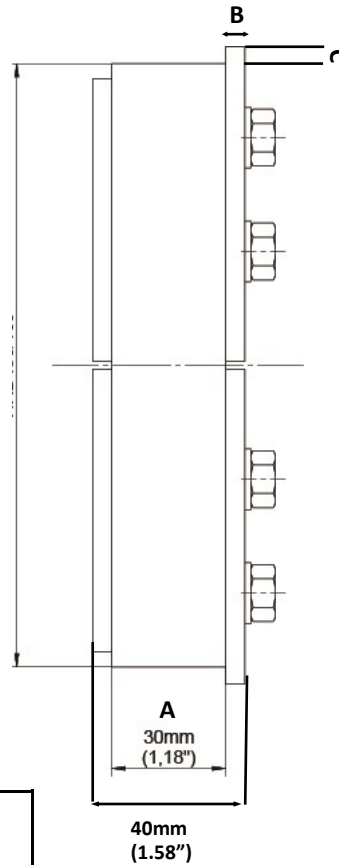


PHRD with Flange

Custom mechanical seal with flange

- Durable materials stand up to corrosive environments and rodent infestation.
- Reliable gastight, watertight performance guaranteed.
- Easy installation for new or installed cables/pipes with one-piece split design.
- EDPM, Nitrile Silicone rubbers available.
- Opening size must be specified.

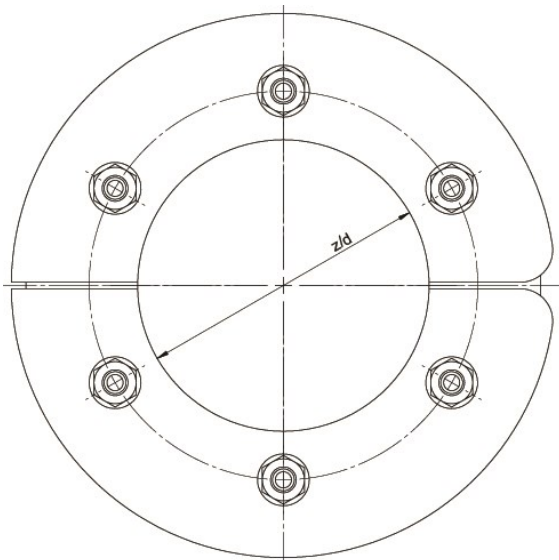

	Rubber Thickness (A)	Thickness of Pressure plates (B)	Standard Flange Extension (C)
PHRD-F	1.18"	0.39"	0.2"

Rubber thickness and overall height of seal may vary due to custom specifications.

SPECIFICATIONS AND APPLICATIONS:.

- **EPDM/Nitrile/Silicone rubber and 304 stainless steel pressure plates and bolts. 316 stainless can be specified.**
- **Temperature Storage Range:** PHRD storage range is: 40°F to 85°F (5°C to 30°C).
- **Watertightness Testing:** UL Certification Water Tightness, Elastomeric Aging, and Assembly

Engineering Specification

Job Name _____ Contractor _____

Job Location _____ Approval _____

Engineer _____ Contractor P.O.No. _____

Approval _____ Representative _____

Submittal Sheet PHRD with flange

Quantity	Trade Size	Seal Diameter	Max ID of 1-opening	Flange Extension Standard 0.2" or Custom size	PN
	1.5		0.79"		Custom
	2		1.11"		Custom
	2.5		1.58"		Custom
	3		2.05"		Custom
	3.5		2.52"		Custom
	4		3.00"		Custom
	5		4.02"		Custom
	6		4.98"		Custom
	8		6.80"		Custom
	10		8.55"		Custom
	12		9.06"		Custom
	14		10.83		Custom
	16		13.15		Custom
	Custom				Custom

Project Specifications

11222 60th Street N Stillwater
Minnesota 55082
800-328-9384
support@polywater.com

